

# **REQUEST FOR QUOTATION 04-2024**

## **Sidewalk Replacements**

Questions and Answers: September 23, 2024

Deadline for Submissions: September 24, 2024



### **The Corporation of the Town of Shelburne**

203 Main Street East | Shelburne, ON L9V3K7

Phone: 519-925-2600 | Fax: 519-925-6134

Email: [treasurer@shelburne.ca](mailto:treasurer@shelburne.ca)



## **QUESTIONS RECEIVED**

**Q1: Scope of Work:** The tender document does not include a detailed scope of work. Could you please provide a comprehensive description of the scope of work for this project? Understanding the full extent of the project will help us prepare a more accurate and informed quotation.

**A1:** Please refer to section 1.0 General Description for scope of work.

- Removal of existing sidewalks, disposal, and replacement of sidewalks,
- Restoration along replacement sidewalks with topsoil and grass seed,
- All traffic control will follow Book 7 and the responsibility of the contractor,
- Any driveways and business entrances impacted with sidewalk replacements will be fully reinstated in 2 days,
- Follow all OSPD specifications in regards to the scope of work.

**Q2: Concrete Testing Requirements:** Are there any specific concrete testing requirements that need to be addressed throughout the project? If so, could you provide details on the type and frequency of tests required?

**A2:** A sample test from each cement truck will be taken for a 28 day cure time to the strength of 32MPa.

**Q3:** Would you kindly provide the **Dimensions** & the **Thickness** of the Concrete Panels?

**A3:** Dimensions and thickness to follow OPSD standards. OPSD standards attached.



**Q4:** In RFQ document, **2.0 SUBMISSION**, “All Proponents shall provide a list on a separate sheet providing any features they will provide in addition to the basic specifications required for this bid”. Would you please clarify what kind of Features would you like to be added to the Basic Specifications?


**A4:** Please refer to the OPSD standards attachment.

**Q5:** In RFQ document, **2.1 QUOTATION EVALUATION CRITERIA**, “Conformity to Specification” has 30% of the assessment value. Would you kindly clarify this section further? What type of information we need to provide to comply to these Specification?


**A5:** Information to demonstrate following the specification of work and completion date.

**Q6:** Would an added value feature be considered a town of Shelburne emblem imprinted in the concrete? Please advise.

**A6:** This would not be considered an added value feature.

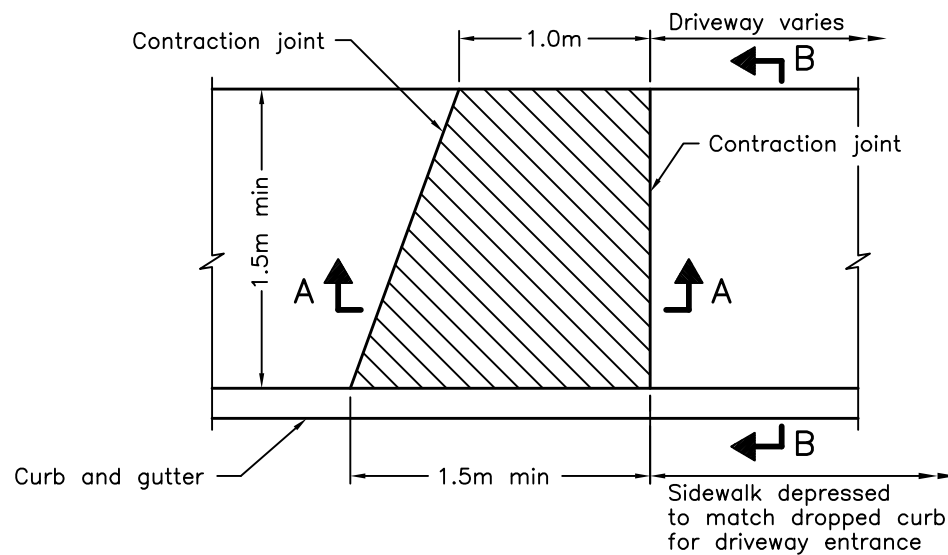


FULLY DEPRESSED

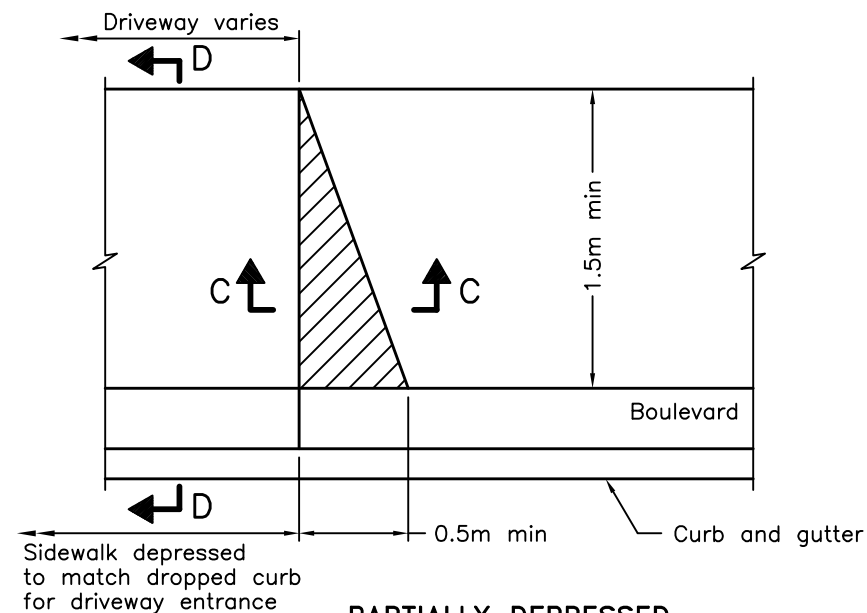


PARTIALLY DEPRESSED


PLAN

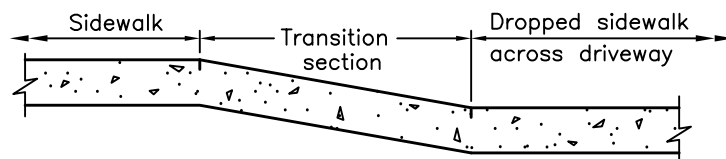


SIDEWALK WITHOUT BOULEVARD  
SECTION A-A

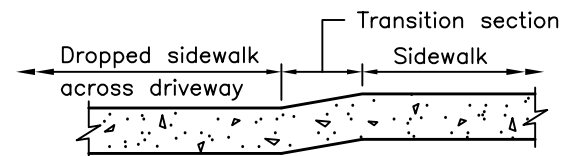

SIDEWALK WITH BOULEVARD  
SECTION C-C

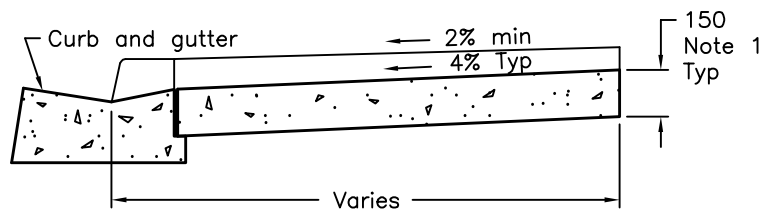

SECTION B-B

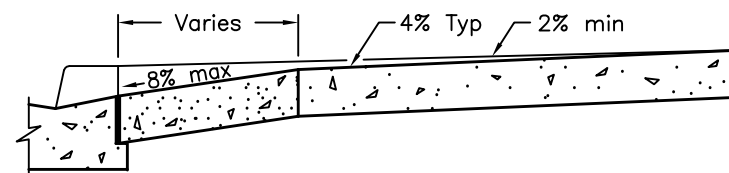

SECTION D-D

NOTES:

- 1 At commercial and industrial driveways, the thickness shall be 200mm.
- A For contraction joint detail, see OPSD 310.010.
- B All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING


Nov 2019

Rev 3

CONCRETE SIDEWALK  
DRIVEWAY ENTRANCE DETAILS

OPSD 310.050



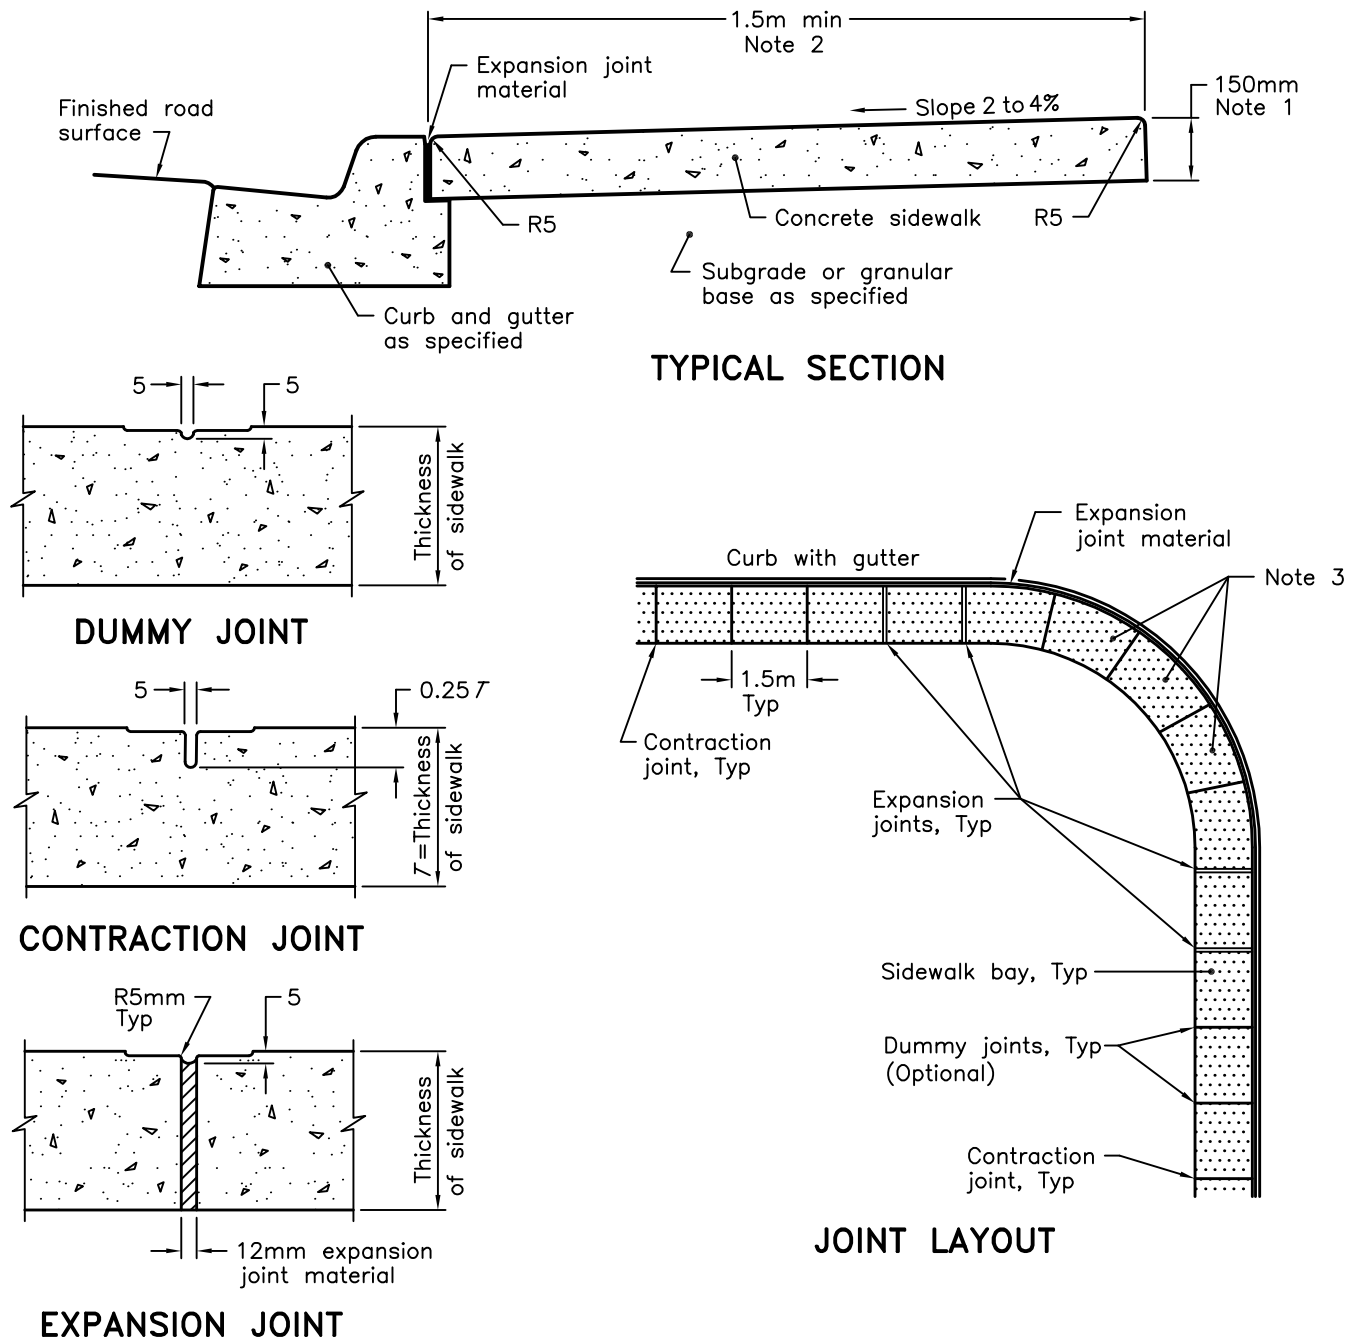

#### NOTES:

- 1 At commercial and industrial driveways, the thickness shall be 200mm.
- 2 Sidewalk width shall be wider when specified.
- 3 This OPSD shall be read in conjunction with OPSD 310.030, 310.031, 310.033, and 310.039.

A All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2019


Rev 3

CONCRETE SIDEWALK


ADJACENT TO CURB WITH GUTTER




OPSD 310.020

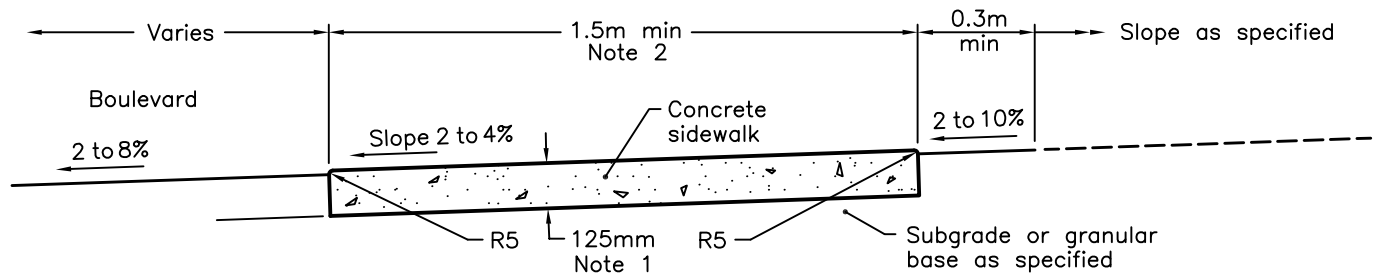


**TYPICAL SECTION**

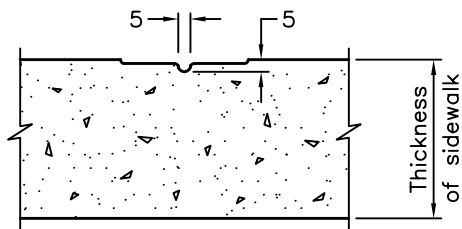


**DUMMY JOINT (OPTIONAL)**

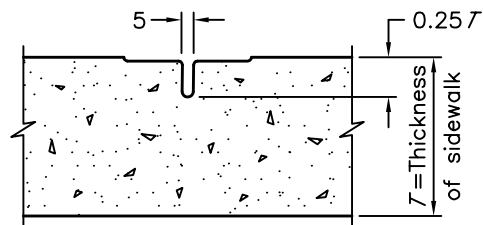

**CONTRACTION JOINT (Note 4)**

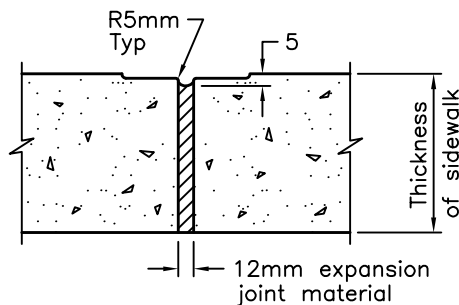

**EXPANSION JOINT**

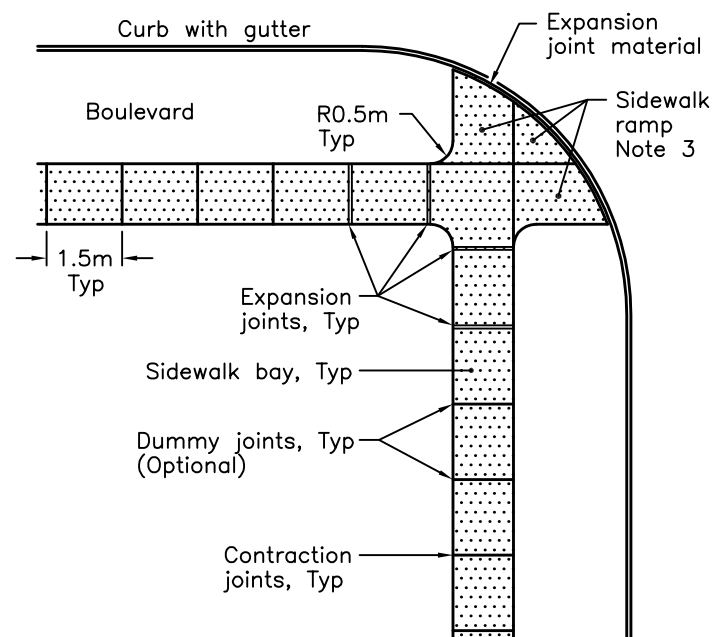

**JOINT LAYOUT**

**NOTES:**

- 1 Sidewalk thickness at residential driveways and adjacent to curb shall be 150mm. At commercial and industrial driveways, the thickness shall be 200mm.
- 2 Sidewalk width shall be wider when specified.
- 3 This OPSD shall be read in conjunction with OPSD 310.030, 310.031, 310.033, and 310.039.
- 4 Contraction Joint may be tooled or sawcut.
- A All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING

Nov 2019

Rev 3

CONCRETE SIDEWALK

OPSD 310.010

